



THIS DRAWING AND THE INFORMATION CONTAINED HEREON ARE THE PROPERTY OF IMR, Inc. THIS DRAWING IS INTENDED FOR THE SOLE USE OF IMR, Inc., AND ITS AUTHORIZED CLIENTS ONLY.

HP-17

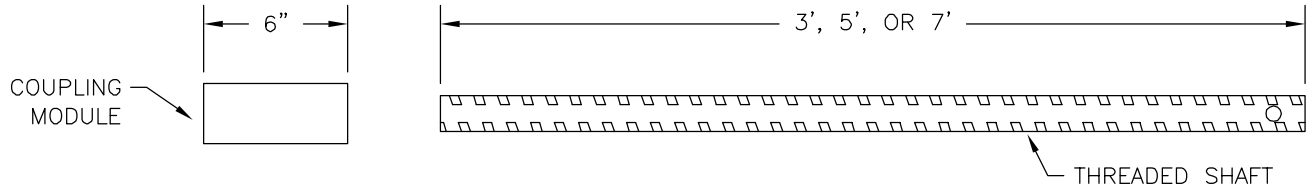

EXTENSION
NO SCALE

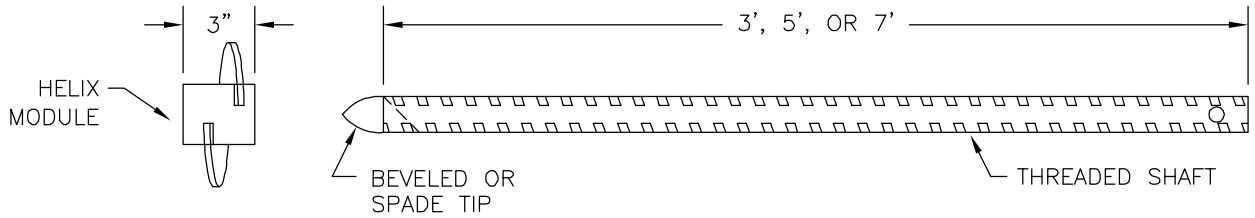

LEAD SECTION
SINGLE OR MULTIPLE HELIX
NO SCALE

NOTES:

1. ALL SHAFTS PER ASTM A29, Fy=90 KSI, 1.5 INCH SQUARE.
2. ALL HELICES 0.5 INCH THICK AND ARE PER ASTM A656, Gr 80 TYPE 7 (Fy=80 KSI).
3. HELIX MODULES COME IN 8 INCH, 10 INCH, 12 INCH, AND 14 INCH DIAMETER.
4. HELIX MODULES ARE PLACED ALONG THE SHAFT SMALLER TO LARGER FROM THE TIP. EQUAL DIAMETER HELICES MAY BE PLACED CONSECUTIVELY.
5. THE CENTER OF THE FIRST HELIX MODULE IS TYPICALLY LOCATED APPROXIMATELY 4 TO 5 INCHES FROM THE TIP.
6. HELIX MODULES SHALL BE CENTER TO CENTER SPACED ALONG THE SHAFT A MINIMUM OF 3 DIAMETERS OF THE SMALLER HELIX. FOR EXAMPLE, 24 INCHES MINIMUM BETWEEN AN 8 INCH HELIX AND A 10 INCH HELIX.
7. ALL HELIX AND COUPLING MODULES ATTACHED TO THE THREADED SHAFT VIA STEEL KEYS.
8. LOAD TRANSFER MODULES (NOT SHOWN) SCREW TO THE THREADED SHAFT.
9. LOAD TRANSFER MODULES ARE DESIGNED FOR 110 KIP ULTIMATE CAPACITY, TENSION OR COMPRESSION.
7. ULTIMATE CAPACITY OF SHAFT/HELIX/LOAD TRANSFER MODULES IS 110 KIPS, TENSION OR COMPRESSION.
8. ULTIMATE INSTALLATION TORQUE IS 11,000 FT-LBS.
9. ALL STEEL GALVANIZED PER ASTM B633-85 FE/ZN 5, TYPE III, APPLIED BY AN ISO 9000 COMPANY.

<p>HELI-PILE[®] IMR, Inc. - DENVER 5135 Ward Road, Wheat Ridge, Colorado, 80033 USA 303-423-0591 Fax: 303-423-9155 www.helipile.com</p>	<p>SPECIFICATION SHEET</p>	<p>1.75 INCH MODULAR EXTRA HIGH STRENGTH HELICAL PILES</p>
	<p>DRAWN BY: RJV ENGINEER: JSP</p>	<p>HP-17.DWG SHEET 1 OF 1 DATE: 01/17/12 REVISION: 5</p>